



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: H01L 21/205	A1	(11) International Publication Number: WO 00/79576 (43) International Publication Date: 28 December 2000 (28.12.2000)
(21) International Application Number: PCT/KR00/00642 (22) International Filing Date: 19 June 2000 (19.06.2000) (30) Priority Data: 1999/23078 19 June 1999 (19.06.1999) KR (60) Parent Application or Grant GENITECH, INC. [/]; O. LEE, Chun-Soo [/]; O. KANG, Won-Gu [/]; O. LEE, Kyu-Hong [/]; O. YI, Kyoung-Soo [/]; O. LEE, Chun-Soo [/]; O. KANG, Won-Gu [/]; O. LEE, Kyu-Hong [/]; O. YI, Kyoung-Soo [/]; O. HUH, Jin-Seok; O.	Published	
(54) Title: CHEMICAL DEPOSITION REACTOR AND METHOD OF FORMING A THIN FILM USING THE SAME (54) Titre: REACTEUR DE DEPOT CHIMIQUE ET PROCEDE DE FORMATION D'UN FILM MINCE A L'AIDE DE CE REACTEUR		
(57) Abstract <p>A chemical deposition reactor capable of switching rapidly from one process gas to another and method of forming a thin film using the same. The reactor of the present invention comprises: a reactor cover, having an inlet and an outlet, for keeping reactant gases from other part of the reactor where the pressure is lower than inside of the reactor; a gas flow control plate, fixed onto the reactor cover, for controlling the gas flow through inlet and outlet by the spacing between itself and the reactor cover; and a substrate supporting plate for confining a reaction cell with the reactor cover. The method of the present invention can be accomplished using the above reactor. In the method, process gases including a deposition gas, a reactant gas and a purge gas are sequentially and repeatedly supplied in the reactor to form a thin film on a substrate. A RF (Radio Frequency) plasma power is applied to a plasma electrode of the reactor synchronised with the supply of at least one among the process gases.</p> <p>(57) Abrégé Cette invention se rapporte à un réacteur de dépôt chimique, qui permet de passer rapidement d'un gaz de traitement à un autre, et à un procédé de formation d'un film mince à l'aide de ce réacteur. Ce réacteur comprend: un couvercle de réacteur, possédant une entrée et une sortie et servant à contenir les gaz réactifs provenant des autres parties du réacteur où la pression est inférieure à celle régnant à l'intérieur du réacteur; une plaque de régulation d'écoulement de gaz, fixée sur le couvercle du réacteur et servant à réguler l'écoulement du gaz traversant l'entrée et la sortie grâce à l'espacement entre la plaque elle-même et le couvercle du réacteur; et une plaque de support de substrat servant à confiner une cellule de réaction sous le couvercle du réacteur. On peut exécuter le procédé faisant l'objet de cette invention en utilisant ledit réacteur. Dans ce procédé, des gaz de traitement tels qu'un gaz de dépôt, un gaz réactif et un gaz de purge sont introduits séquentiellement et de façon répétée dans le réacteur, afin de former un film mince sur un substrat. Un courant de plasma RF (radio fréquence) est appliqué à une électrode de plasma du réacteur en synchronisme avec l'introduction d'au moins l'un desdits gaz de traitement.</p>		

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/79576 A1

(51) International Patent Classification: H01L 21/205

(21) International Application Number: PCT/KR00/00642

(22) International Filing Date: 19 June 2000 (19.06.2000)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
1999/23078 19 June 1999 (19.06.1999) KR

(71) Applicant (for all designated States except US): GEN-
ITECH, INC. [KR/KR]; 1694-5 Simil-dong, Taedok-ku,
Taejon 306-230 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LEE, Chun-Soo
[KR/KR]; 109-202 Hanbit Apt., 99 Ubeun-dong, Yu-
song-gu, Taejon 305-333 (KR). KANG, Won-Gu
[KR/KR]; 118-908 Hanbit Apt., 99 Ubeun-dong,

Yusong-gu, Taejon 305-333 (KR). LEE, Kyu-Hong
[KR/KR]; 105-606 Hanul Apt., 160-1 Shinsung-dong,
Yusong-gu, Taejon 305-345 (KR). YI, Kyung-Soo
[KR/KR]; 118-1506 Hanbit Apt., 99 Ubeun-dong, Yu-
song-gu, Taejon 305-333 (KR).

(74) Agent: HUH, Jin-Seok; J.S. Hub Patent Office, 206
Sungji Building, 1338-22 Seocho-dong, Seocho-ku, Seoul
137-070 (KR).

(81) Designated States (national): JP, US.


(84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: CHEMICAL DEPOSITION REACTOR AND METHOD OF FORMING A THIN FILM USING THE SAME

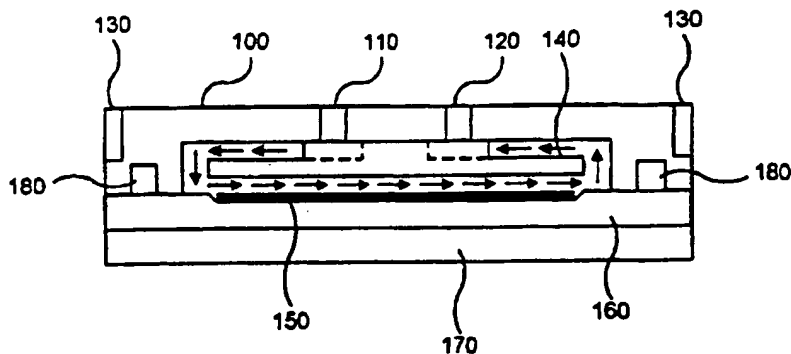

(57) Abstract: A chemical deposition reactor capable of switching rapidly from one process gas to another and method of forming a thin film using the same. The reactor of the present invention comprises: a reactor cover, having an inlet and an outlet, for keeping reactant gases from other part of the reactor where the pressure is lower than inside of the reactor; a gas flow control plate, fixed onto the reactor cover, for controlling the gas flow through inlet and outlet by the spacing between itself and the reactor cover; and a substrate supporting plate for confining a reaction cell with the reactor cover. The method of the present invention can be accomplished using the above reactor. In the method, process gases including a deposition gas, a reactant gas and a purge gas are sequentially and repeatedly supplied in the reactor to form a thin film on a substrate. A RF (Radio Frequency) plasma power is applied to a plasma electrode of the reactor synchronised with the supply of at least one among the process gases.

WO 00/79576 A1

Description

5

10

15

20

25

30

35

40

45

50

55

**CHEMICAL DEPOSITION REACTOR AND
METHOD OF FORMING A THIN FILM USING THE SAME**

TECHNICAL FIELD

The present invention relates to a chemical deposition reactor used in a chemical deposition apparatus where reactant materials are supplied discontinuously or sequentially so that the reactant materials are not mixed in gas phases, and more particularly, to a chemical deposition reactor capable of switching rapidly from one process gas to another. The present invention also relates to a method of forming a thin film for use in semiconductor or flat display devices using the above reactor.

BACKGROUND ART

In the manufacture of semiconductor devices, efforts for improving apparatuses and processes have been continued in order to form a high quality thin film on a substrate. Recently, processes for forming a thin film using surface reaction of a semiconductor substrate were proposed. In the processes, thin films are formed by following three methods: Reactant materials are discontinuously supplied to the substrate; a type of thin film is formed by an atomic layer deposition; or reactant materials are sequentially supplied one by one to the substrate. According to the above methods, a film having uniform thickness can be obtained on the whole substrate regardless of the surface roughness of a substrate and impurities in the film can be reduced, resulting in a high quality film.

However, because reactors used in conventional chemical deposition apparatuses are designed to form a thin film using a process where reactant materials are simultaneously supplied into the reactors, the reactors are not optimal for the above three methods.

In a reactor where chemical deposition materials are supplied over a semiconductor substrate, reactant gases usually flow downward over the semiconductor substrate. In this case, a shower head is usually disposed between a reactant gas inlet and the substrate for the uniform flow of the reactant gas over the substrate. However, such a configuration makes the gas flow complex and requires a large size reactor, making rapid switching of reactant gases difficult. Accordingly, the

5 conventional reactor employing a shower head is inadequate for the process where reactant gases are sequentially supplied to the reactor.

10 On the other hand, in the manufacture of semiconductor or flat display devices, high quality thin films are required. Such thin films may include metal films, 5 insulator films such as metal oxide films, metal nitride films and etc., films for capacitors, interconnects and electrodes, inorganic films used for diffusion prevention, and etc.

15 These thin films may be formed by a physical vapor deposition, for example a sputtering process. The sputtering process, however, forms thin films with poor step 10 coverage, so a chemical vapor deposition method is usually employed to improve the step coverage.

20 One of the most common chemical vapor depositions of the prior art is carried out by an apparatus as shown in FIG. 1A. Referring to FIG. 1A, process gases or other reactants 11, 12, 13 are supplied into a reactor 1, respectively, through mass 25 15 flow controllers 21, 22, 23 and valves 30, 31, 32. In this case, a shower head 4 is utilized to obtain uniform flow 5 of the process gases. When a source material is liquid or solid having low equilibrium vapor pressures, a vaporizer 16 is also employed that can heat the source material in a suitable temperature to vaporize and 30 can supply the vaporized source material into the reactor 1 with the carrier gas 13. 20 When the vaporizer is employed, the initial portion of the source material carried by the carrier gas 13 is exhausted via a bypass valve 33 and an outlet tube 18 due to the fluctuation of flow rate and source material concentration. Then, the bypass valve 33 35 is shut off and a valve 32 connected to a central supplying tube 17 is opened to supply the carrier gas into the reactor 1.

40 25 The chemical vapor deposition of the prior art performed in this apparatus has the following features: At first, all process gases 11, 12, 13 required for the deposition are supplied into the reactor 1 at the same time so that the film is continuously deposited during the process times 11', 12', 13' as in an example shown 45 in FIG. 1B. At second, the shower head 4 is usually employed to make uniform flow 30 5 of the process gases on the surface of a substrate.

50 This method has the following disadvantages: At first, since all process gases exist within the reactor at the same time, the process gases may react in gas phase

5 thereby can deteriorate step coverage of the deposited film and/or produce particles
which contaminate the reactor. At second, when using a metal-organic compound as a
source material, it is difficult to deposit the film that does not contain carbon
10 impurities. At third, in the case of depositing a multi-component film, all the reactant
5 materials must react simultaneously while the supply of each reactant material is
controlled separately by mass flow of the carrier gas, so it is very difficult to control
the composition of the deposited film precisely.

15 To overcome the foregoing problems, a method is proposed in which the
process gases are supplied separately as time-divisional pulses rather than supplied
10 continuously.

20 An example of supplying process gases in this deposition method is shown
in FIG. 2A. Valves in a gas introducing part can be opened or closed so that the
process gases can be supplied cyclically as time-divisional pulses into the reactor
without being mixed with each other.

25 Referring to FIG. 2A, it can be seen that the process gases 11, 12, 13 in FIG.
1A are supplied in a cycle T_{cycle} of 13', 12', 11' and 12'. A film can be deposited by
repeating this cycle. In general, purge gas 12 is supplied between the supply pulses of
30 the reactants 11 and 13 so that the remaining reactants are removed from the reactor
before the next reactant is supplied.

20 Hereinafter, a time-divisional deposition mechanism will be described.
Chemical adsorption temperatures of the reactants onto the substrate are generally
35 lower than thermal decomposition temperatures of the reactants. Therefore, when a
deposition temperature is maintained higher than the chemical adsorption temperature
of the reactant onto the substrate and lower than the thermal decomposition
40 temperature of the reactant, the reactant supplied into the reactor only adsorbs
25 chemically onto the surface of the substrate rather than decomposes. Then, the
remaining reactant is exhausted out of the reactor by the purge gas supplied into the
reactor. After that, another reactant is introduced into the reactor to react with the
45 reactant adsorbed on the surface, and thus form a film. Because the reactant adsorbed
30 on the substrate cannot form more than one molecular layer, film thickness formed in
one supply cycle T_{cycle} is constant regardless of amount or time of the supplied
reactants. Therefore, as shown in FIG. 2B, the deposited film thickness is saturated as

5 the supplying time elapses. In this case, the deposited film thickness is controlled only by the number of the repeated supply cycles.

10 In the other hand, when the deposition process temperature is no lower than the thermal decomposition temperature of the reactants, the deposited film thickness is proportional to the supply time of the reactants in the supply cycle because the
5 reactants introduced into the reactor decompose continuously to form films on the substrate. In this case, deposited film thickness according to the supply time of the reactants is shown in FIG. 2C.

However, the foregoing time-divisional deposition has problems as follows:

10 At first, the reactants used in the deposition process must react readily. Otherwise it is difficult to form a film by time-divisional deposition. In this case, a method is required that facilitate the chemical reaction even at low temperatures.

20 At second, the exhausting part of the apparatus may be contaminated with particles due to the reactions between the reactants. The gas-introducing part and the reactor may not be contaminated with the particles due to the reactions of the
25 reactants because the reactants are separated by the purge gas. In the other hand, the exhausting part may be easily contaminated with particles because the reactants mix and react with each other at exhaust.

30 At third, it is required to supply inert purge gas between the reactant supply pulses to prevent gas-phase reactions in the gas-introducing part and the reactor, so the gas-supply cycle is complex, the time for a supply cycle is longer than absolutely
35 necessary, and thus the deposition is slow.

A method is disclosed in the US Patent No. 5,916,365 in which a film is formed by repeating a gas-supply cycle, i.e., supplying first reactant gas into a reactor,
40 exhausting remaining reactant gas within the reactor by a vacuum pump, supplying second reactant gas which is activated by passing through a radical generator using an RF power or other means, and exhausting remaining reactant gas by the vacuum pump.

45 The exhaust rate of the vacuum pump decreases as the pressure decreases, so it takes long time to exhaust the remaining reactant gases from the reactor with the
30 vacuum pump. Therefore, in this method, it is difficult to have high growth rate of the film per unit time when it desired to exhaust the remaining reactant gases completely.

5 When the exhausting time is too short, the reactant gases remain in the reactor so that
the two reactant gases mix and react in gas phase. Furthermore, in the method of the
10 US Patent No. 5,916,365, it is difficult to maintain stable plasma in the reactor
because the supply and exhaust of the reactant gases cause wide pressure variation in
5 the reactor.

DISCLOSURE OF INVENTION

15 Therefore, it is an object of the present invention to provide a reactor which
can switch gas supply rapidly from one process gas to another and reduce the
10 footprint of a chemical deposition apparatus into which reactant gases are
discontinuously or sequentially supplied.

20 It is another object of the present invention to provide a reactor which makes
the maintenance of a chemical deposition apparatus easier by minimizing areas
exposed to reactant gases and reducing cleaning requirement.

25 15 It is a further object of the present invention to provide a reactor capable of
preventing formation of a film on a circumference of semiconductor substrate.

It is a further object of the present invention to provide a reactor employing a
30 plasma generator for cleaning the reactor and activating reactant gases.

35 20 It is a further object of the present invention to provide a method which can
form a thin film effectively even if reactants do not react readily in a time-divisional
source supply chemical vapor deposition method.

It is a further of the present invention to provide a method which can
35 minimize supply time of a purge gas in a gas-supplying cycle to reduce cycle time in
a time-divisional source supply chemical vapor deposition.

40 25 It is a further of the present invention to provide a method which can reduce
particle contamination of the apparatus at the exhausting part of an apparatus for
time-divisional source supply chemical vapor deposition.

45 30 In order to realize those foregoing objects related to the reactor, the present
invention provides a reactor comprising: a reactor cover, having an inlet and an outlet
for reactant gases, for keeping the reactant gases from other part of the reactor where
the pressure is lower than inside of the reactor; a gas flow control plate having a
projecting portion, with the projecting portion fixed onto the reactor cover, for
50

5 controlling the gas flow through inlet and outlet by the spacing between itself and the reactor cover; and a substrate supporting plate contacting with the reactor cover in order to confine a reaction cell with the reactor cover.

10 The reactor of the present invention may further comprise a leakage-preventing gas passage, disposed along the contact portion between the reactor cover and the substrate supporting plate, for preventing leakage of reactant gases from the reaction cell.

15 Preferably, the opposing surfaces of the gas flow control plate and the reactor cover are substantially parallel with each other except for the projecting portion.

20 In addition, the reactor cover may further comprise protrusion means covering the circumference of the substrate so that the reactant gases may not contact with the circumference of the substrate, preventing the film formation thereon.

25 In order to activate reactant gases in the reaction cell, a plasma electrode is preferably disposed on the reactor cover or on the gas flow control plate

30 In order to realize those foregoing objects related to the thin film forming method, the present invention provides a method used for a chemical vapor deposition in which source gases for forming a thin film are supplied into a reactor in a time-divisional manner so that they may not be mixed with each other in the reactor.

35 In the method of the invention, the process gases are activated into plasma to facilitate the film formation, wherein plasma is generated synchronously with gas supply cycle.

For more clear description, process gases are classified as three kinds:

40 At first, the process gas that thermally decomposes to form a solid film is called a deposition gas. The deposition gas includes, for example, titanium-organic compound used for chemical vapor deposition for forming a TiN film.

45 At second, the process gas that does not decompose by itself or does not form a solid film upon self-decomposition, however, forms a solid film when reacts with a deposition gas is called a reactant gas. The reactant gas includes, for example, ammonia used in a chemical vapor deposition process for forming a nitride film, and oxygen gas used in a chemical vapor deposition process for forming an oxide film.

50 At third, the other inert process gas that is supplied between the supplies of

5 the deposition gas and the reactant gas to separate the deposition gas and the reactant
gas is called a purge gas. In general, helium, argon, nitrogen gas and etc. are used for
a purge gas. Those gases contain the constituent element of the film may also used for
10 a purge gases if they do not react with a deposition gas. In this case, the purge gas can
5 be used for a reactant gas when activated by plasma.

Therefore, one of the most evident features of the present invention, in a
chemical vapor deposition which forms a film on a substrate by supplying process
15 gases which include a deposition gas, a reactant gas, and a purge gas into a reactor by
repeating cycles of time-divisional gas supply, is to provide a method of generating
10 plasma on the substrate synchronously with the supply cycles to activate at least one
of the process gases. In this case, the plasma is generated synchronously with the
20 supply cycle of the reactant gas.

Also, when a purge gas contains constituent elements of a film material and
a reactant gas contains the other constituent elements of the film material and the
25 15 purge gas does not substantially react with the reactant gas, plasma may be preferably
generated synchronously during the supply cycle of the purge gas.

In the other hand, a film is deposited by alternate supply of only a deposition
gas and a purge gas without any reactant gas into a reactor. In this case, the purge gas
30 preferably contains constituent elements of a film material and does not react
substantially react with the deposition gas if not activated; wherein plasma is
20 preferably generated synchronously at least in part during the supply cycle of the
purge gas to facilitate the reaction of the purge gas with the deposition gas.
35

The films deposited by above methods may be heat-treated after the
deposition.

25 40 BRIEF DESCRIPTION OF DRAWINGS

FIG. 1A and FIG. 1B are drawings showing an apparatus for a chemical
vapor deposition and a method of supplying reactant gases employed in a film
45 deposition process of the prior art;

30 FIG. 2A to FIG. 2C are graphs showing a deposition process of the prior art
which supply reactant gases in a time-divisional manner;

FIG. 3 is a cross sectional view of a chemical deposition reactor according to

5 a first embodiment of the present invention;

FIG. 4 shows a gas flow control plate used for the reactor according to the embodiment of the present invention;

10 FIG. 5 is a cross sectional view of a chemical deposition reactor according to a second embodiment of the present invention;

FIG. 6 is a cross sectional view of a chemical deposition reactor according to a third embodiment of the present invention; and

15 FIG. 7A and FIG. 7B are drawings showing methods of supplying reactant gases employed in a film deposition process of the present invention.

20 BEST MODE FOR CARRYING OUT THE INVENTION

Preferred embodiments of the present invention will be described hereinafter in reference to the appended drawings:

25 FIG. 3 is a cross sectional view of a chemical deposition reactor according to a first embodiment of the present invention. Referring to FIG. 3, a reactor cover 100 has an inlet 110 and an outlet 120 for process gases. The circumference of the reactor cover 100 is surrounded by a cover heater 130.

30 A gas flow control plate 140 having a projecting portion is fixed onto the lower surface of the reactor cover 100, controlling the gas flows (indicated by arrows) passed through the inlet 110 and outlet 120 by the spacing between the gas flow control plate 140 and the reactor cover 100. The spacing can be determined arbitrarily. On the other hand, a semiconductor substrate 150 on which a chemically deposited film to be formed is loaded on a substrate supporting plate 160. The temperature of the substrate 150 is controlled by a supporting plate heater 170 disposed under the substrate supporting plate 160. In this case, it is desirable to keep the reactant gases from leaking to other part of the reactor where the pressure is lower than inside of the reactor. On this purpose, an inert gas may be introduced along the contact portion between the reactor cover 100 and the substrate supporting plate 160. Accordingly, 40 the reactor cover 100 has a groove along its circumference to be used as a leakage-preventing gas passage 180. The gas flow control plate 140 controls the flow of process gas introduced into the reactor in order to facilitate gas exhaust without undesirable residual gas within the reactor.

5 FIG. 4 shows a gas flow control plate used for the reactor according to the
embodiment of the present invention. According to the operation of such a gas flow
control plate, the process gases introduced through a gas inlet are uniformly diffused
10 in the reactor and then flow horizontally in a small space between the gas flow
control plate and the semiconductor substrate, exiting via gas outlet. By using the gas
15 flow control plate, process gases flow horizontally over the semiconductor substrate
and gas supply from one process gas to another can be rapidly switched because the
interior volume of the reactor is small.

 FIG. 5 is a cross sectional view of a chemical deposition reactor according to
10 a second embodiment of the present invention.

 Hereinafter, same reference numbers designate the same elements of FIG. 3
20 and repeated description will be omitted for brevity.

 According to the second embodiment of the present invention, the inner
diameter of the reactor cover is larger than that of semiconductor substrate at their
25 contact portion so that the reactor cover may cover the circumference of the
semiconductor substrate. That is, a protrusion 190 disposed under the reactor cover
prevents reactant gases from contacting with the circumference of the substrate, and
no film is formed thereon.

 FIG. 6 is a cross sectional view of a chemical deposition reactor according to
20 a third embodiment of the present invention. Referring to FIG. 6, a plasma electrode
200, opposite to the semiconductor substrate 150, is installed in the gas flow control
plate 140, generating plasmas to clean the inside of the reactor as well as to activate
35 reactant gases to facilitate film formation.

 Herein above the invention has been described in reference to the preferred
25 embodiments, but various other modifications and variations will be apparent to those
skilled in the art without departing from the scope and spirit of the present invention.

 Therefore, the reactor cover and the gas flow control plate may be
constructed as one body unlike the above embodiment where the gas flow control
plate is attached to the reactor cover. In addition, the plasma electrode may be
45 installed in the reactor cover.

 Next, method of forming thin films for use in semiconductor or flat display
devices by using the above reactor of the present invention will be described.

5 A first embodiment of the present invention method which is carried out according to FIG. 7A and FIG. 7B using the reactor of the present invention is as follows.

10 FIG. 7A is a graph showing that the process gases are supplied into the reactor in the supply cycle of deposition gas 13', purge gas 12', reactant gas 11' and
5 purge gas 12'. At first, the deposition gas 13' is supplied into the reactor to be adsorbed to the substrate, and then the purge gas 12 is supplied to remove the remaining deposition gas from the reactor. Then, the reactant gas 11' is supplied into
15 the reactor and at the same time the switch 310 is closed to activate the reactant gas 11' with plasma, and thus facilitate chemical reaction with the deposition gas 13' adsorbed onto the substrate. When supply of the reactant gas is interrupted, the switch
20 310 is opened to stop plasma generation and the purge gas 12' is introduced to remove the remaining reactant gas. In this method, the film can be formed even if the reaction between the deposition gas 13' and reactant gas 11 is weak because the reactant gas
25 11 is activated with plasma.

For example, when a metal-organic compound is used as chemical vapor deposition source, plasma-activated reactant gas may accelerate decomposition of the metal-organic compound and reduce carbon contamination of the film. Also, the
30 activation energy applied to the film by the plasma may enhance crystallization, physical characteristics and electrical characteristics of the film.

As a detailed example of this process, a copper compound may be reduced to form a metallic copper film. In the temperature no higher than thermal decomposition temperature of the deposition gas, chemical reaction between the deposition gas and hydrogen gas, i.e. the reactant gas, does not take place and thus a metallic copper film
35 cannot be formed. Therefore, a plasma electrode as described in the reactor of the present invention is installed, and plasma is generated as hydrogen gas is supplied into the reactor so that chemical reaction between the hydrogen gas and the copper source adsorbed to the substrate surface may be accelerated and thus form a metallic
40 copper film. If the plasma generator is powered on while supplying the deposition gas, the copper source may decompose in gas phase so that particle contamination or poor step coverage may take place. Therefore, it is advantageous to synchronize RF power
45 applied to the plasma generator with the supply cycle in such a manner that the
50

5 plasma generator is powered off when the deposition gas is supplied and on only when the reactant gas is supplied.

10 According to second embodiment of the present invention, a gas that may undergo a very weak chemical reaction with the deposition gas, if any, may be employed as a reactant gas or a purge gas, in condition that this gas contains constituent elements of the film. A gas supplying method like this is shown in FIG. 7B. In this method, the deposition gas 13' is primarily adsorbed to the substrate, the remaining deposition gas is removed by the purge gas 12' which undergoes almost no chemical reaction with the deposition gas, if any, but may include constituent elements of the film, and then the plasma generator is powered on to transform the purge gas 12' into the reactant gas 15'. This reactant gas 15' can form a film by reacting with the deposition gas absorbed to the substrate. Then, after the plasma generator is powered off to stop the reaction, the deposition gas 13' can be supplied again into the reactor without any concerns about gaseous reaction. Therefore, during 25 purge gas supply in the gas supply cycle, the plasma power supply is switched in the order of off, on, and off, thereby is equivalent of supplying a purge gas, a reactant gas and a purge gas, respectively. Also, the concentration of the activated species decreases very rapidly after the plasma power is turned off, so supply time of the purge gas can be minimized after the plasma power is off. In this kind of gas supply 30 cycle, the gas-supply cycle consists of turn-on and turn-off of plasma generator instead of the supply of different gases. This method permits the time-divisional chemical vapor deposition with only two kinds of gases, so the gas supplying part of an apparatus can be simple and the cycle time of gas supply can be reduced. Furthermore, the deposition gas and the purge gas do not react with each other even if 35 mixed, so there is no concerns about the particle contamination in the exhausting part.

40 Both of the foregoing two embodiments can be employed for the deposition of TiN film which is used for diffusion barrier as well as adhesive and anti-reflectory coatings.

45 Using the first embodiment, a TiN film may be formed by repeating the cycle of the supply of Ti-organic source for a deposition gas, ammonia gas for a reactant gas, and nitrogen gas for a purge gas, in which plasma is generated when the reactant gas is supplied.

5 When employing the second embodiment, Ti-organic source is used for a deposition gas, nitrogen gas for a purge gas, respectively, in which the plasma generator is powered on thereby causing the absorbed deposition gas to react with
10 nitrogen gas after the deposition gas is removed by nitrogen gas. A TiN film may be
5 formed by repeating the cycle including these steps. In this case, the nitrogen purge gas never reacts with the deposition gas when the plasma power supply is off so that particle is not generated at all.

15 As described above, in order to properly realize the method of the present invention in which the supplies of reactant gases should be rapidly switched, it will be
10 appreciated that the reactor of the present invention, having the gas flow control plate, is very useful.

INDUSTRIAL APPLICABILITY

25 As described above, according to the reactor of the present invention,
15 deposition rate can be enhanced due to high speed switching of gas supplies in a chemical deposition process in which reactant gases are discontinuously or sequentially supplied to a substrate.

30 In addition, since the supply and exhaust of reactant gases are performed over a semiconductor substrate, the footprint of a chemical deposition apparatus in a
20 semiconductor clean room can be reduced, reducing the maintenance fee of the apparatus.

35 In addition, a film is not formed on a circumference of semiconductor substrate, preventing particle contamination problem in consecutive processes.

40 Moreover, the reactor can be easily cleaned and reactant gases can be easily
25 activated by plasma generation.

According to the method of the present invention, a film can be formed effectively even if reactants do not react readily in a time-divisional source supply chemical vapor deposition method.

45 In addition, supply time of a purge gas in a gas-supplying cycle can be
30 minimized to reduce cycle time in a time-divisional source supply chemical vapor deposition, reducing the overall process time.

In addition, particle contamination of the apparatus at the exhausting part of

5

an apparatus for time-divisional source supply chemical vapor deposition can be reduced.

10

15

20

25

30

35

40

45

50

55

Claims

5

10

15

20

25

30

35

40

45

50

55

5

WHAT IS CLAIMED IS :

10

1. A reactor of a chemical deposition apparatus, said reactor comprising:
a reactor cover, having an inlet and an outlet for reactant gases, for keeping
the reactant gases from other part of the reactor where the pressure is lower than
inside of the reactor;

15

a gas flow control plate having a projecting portion, with the projecting
portion fixed onto the reactor cover, for controlling the gas flow through inlet and
outlet by the spacing between itself and the reactor cover; and

- a substrate supporting plate contacting with the reactor cover in order to
confine a reaction cell with the reactor cover.

20

2. The reactor of claim 1, further comprising a leakage-preventing gas
passage, disposed along the contact portion between the reactor cover and the
substrate supporting plate, for preventing leakage of reactant gases from the reaction
cell.

25

3. The reactor of claim 1, wherein the opposing surfaces of the gas flow
control plate and the reactor cover are substantially parallel with each other except for
the projecting portion.

30

4. The reactor of claim 1, wherein the reactor cover further comprises
protrusion means covering the circumference of the substrate so that the reactant
gases may not contact with the circumference of the substrate.

35

5. The reactor of claim 1, further comprising a cover heater for controlling
the temperature of the reactor cover.

40

6. The reactor of claim 1, wherein a plasma electrode is disposed on the
reactor cover in order to activate the reactant gases in the reaction cell.

7. The reactor of claim 1, wherein a plasma electrode is disposed on the gas
flow control plate in order to activate the reactant gases in the reaction cell.

45

8. A method of forming a thin film using a reactor of a chemical deposition
apparatus comprising: a reactor cover, having an inlet and an outlet for reactant gases,
for keeping the reactant gases from other part of the reactor where the pressure is
lower than inside of the reactor; a gas flow control plate having a projecting portion,
with its protrusion fixed onto the reactor cover, for controlling the gas flow through
inlet and outlet by the spacing between itself and the reactor cover; a substrate

50

55

5 supporting plate contacting with the reactor cover in order to confine a reaction cell with the reactor cover, and a plasma electrode disposed on the reactor cover or the gas flow control plate in order to activate the reactant gases in the reaction cell,

10 said method comprising the steps of:

5 placing a substrate within the reactor;

15 preparing process gases including a deposition gas which forms a film when thermally decomposed but does not decompose thermally at the process temperature, a reactant gas which does not thermally decompose spontaneously at the process temperature or does not form a film upon thermal self-decomposition, and a purge gas
10 for preventing chemical reaction between the deposition gas and the reactant gas; and

20 supplying the process gases into the reactor by repeating a cycle of time-divisional combination of the deposition gas, reactant gas and purge gas, wherein plasma is generated on the substrate synchronously with at least one supply of the process gases in the cycle.

25 9. The method of claim 8, wherein plasma is generated synchronously with the supply of the reactant gases.

30 10. The method of claim 8, wherein the purge gas contains constituent elements of the film material and the reactant gas contains other constituent elements of the film material, respectively; wherein the purge gas does not react substantially with the reactant gas; and wherein the plasma is generated synchronously with the supply of the purge gas.

35 11. The method of claim 8, further comprising the step of heat-treating the thin film after the thin film formation.

40 12. A method of forming a thin film using a reactor of a chemical deposition apparatus comprising: a reactor cover, having an inlet and an outlet for reactant gases, for keeping the reactant gases from other part of the reactor where the pressure is lower than inside of the reactor; a gas flow control plate having a projecting portion, with its protrusion fixed onto the reactor cover, for controlling the gas flow through
45 inlet and outlet by the spacing between itself and the reactor cover; a substrate
30 supporting plate contacting with the reactor cover in order to confine a reaction cell with the reactor cover, and a plasma electrode disposed on the reactor cover or the gas flow control plate in order to activate the reactant gases in the reaction cell,

5

said method comprising the steps of:

placing a substrate within the reactor;

10

preparing process gases including a deposition gas which forms a film when thermally decomposed but does not decompose thermally at the process temperature,

5 a purge gas for exhausting the deposition gas from the reactor, wherein the purge gas contains constituent elements of the film material and substantially does not react with the deposition gas in non-activated state; and

15

supplying the process gases into the reactor by repeating a cycle of time-divisional combination of the deposition gas and purge gas in order to make the deposition gas react with the purge gas, wherein plasma is generated on the substrate

10

20

synchronously with at least one supply of the purge gas in the cycle.

13. The method of claim 12, further comprising the step of heat-treating the thin film after the thin film formation.

25

15

30

35

40

45

50

55

1/5

FIG. 1A


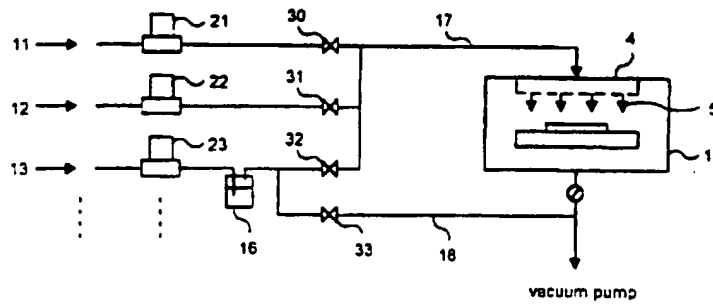


FIG. 1B

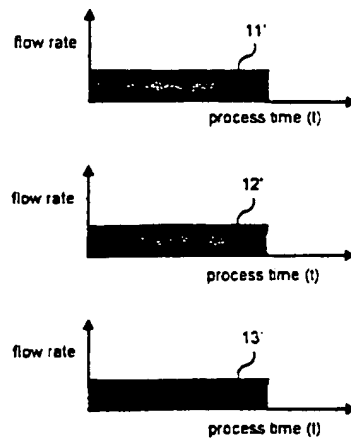

2/5

FIG. 2A

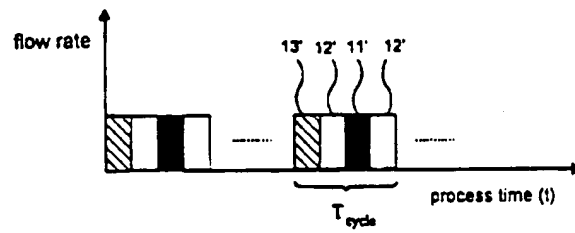


FIG. 2B

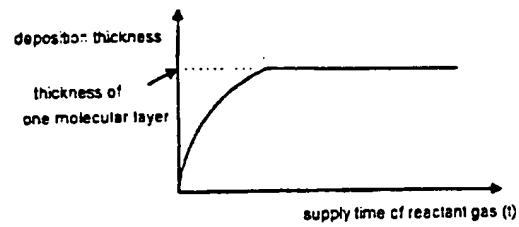


FIG. 2C

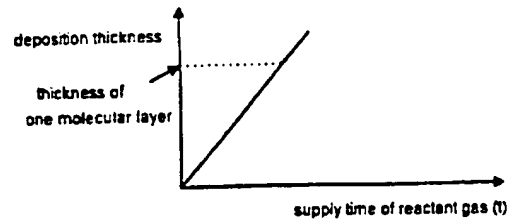


FIG. 3

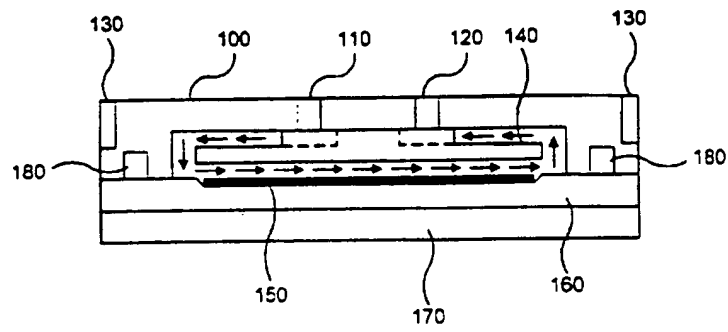


FIG. 4

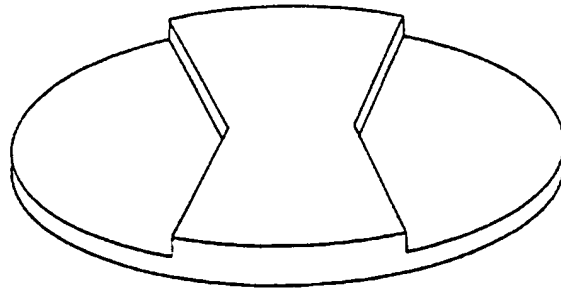


FIG. 5


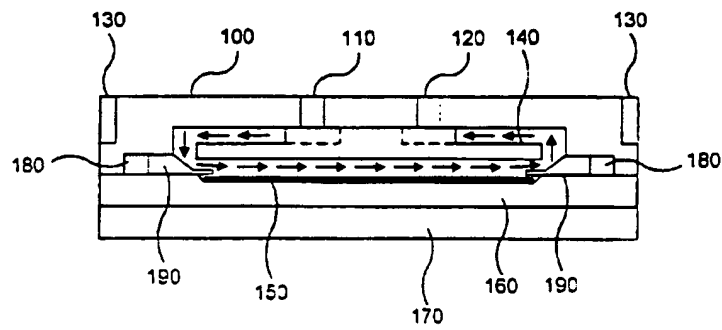


FIG. 6

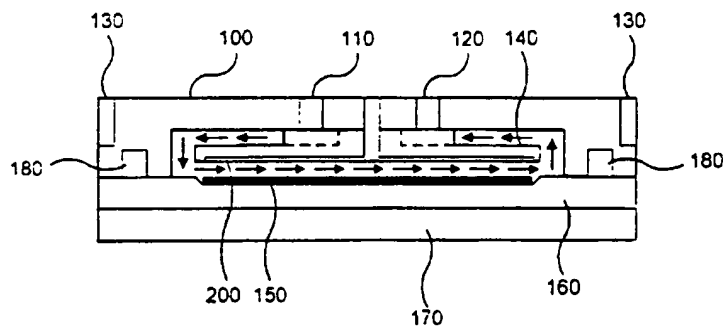

5/5

FIG. 7A





FIG. 7B

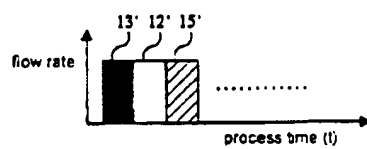

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR00-00642

A. CLASSIFICATION OF SUBJECT MATTER		
IPC7 H01L 21/205		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC7 H01L 21/205, IPC7 H01L 21/20		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Korean Patents and applications for inventions since 1975 Korean Utility models and applications for Utility models since 1975		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
KIPONET		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 04-320025 A (MITSUBISHI ELECTRIC CORP) 10.November.1992(10.11.1992) Fig. 1	1-3
Y	JP 05-047669 A (SUMITOMO METAL IND L.TD) 26.February.1993(26.02.1993) Fig. 1	1-3
	JP 06-291048 B1 (NISSAN ELECTRIC CO. LTD) 18 October 1994(18.10.1994) page 1, lines 1-10 claims 1	8-10
	page 2, column 2, lines 38 - page 3, column 1, line 13 Fig. 1, Fig. 2	
Y	JP 03-048421 A (TOKYO ELECTRON LTD) 01.March 1991(01.03.1991) claims 1,2	8-10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" documents which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" documents published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to underlain the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "A" documents member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
05 OCTOBER 2000 (05.10.2000)		10 OCTOBER 2000 (10.10.2000)
Name and mailing address of the ISA/KR		Authorized officer
Korean Industrial Property Office Government Complex-Taejeon, Dunsan-dong, So-ku, Taejeon Metropolitan City 302-701, Republic of Korea		KIM, Jong Chan
Facsimile No. 82-42-472-7140		Telephone No. 82-42-481-5722

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/KR00/00642

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 06291048 B1	18.10.1994	JP 2646941 JP 6291048	27.08.1997 18.10.1994

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.